

Heritage Lake Culvert Guidelines

Listed below are guidelines for driveway culverts within Heritage Lake Association. These are general guidelines and may not apply in every location. Please submit a permit and consult with the Environmental Control Committee (ECC) / Heritage Lake Board prior to any driveway work - regardless of the addition of a hard surface. Do not proceed with driveway or culvert work without a permit.


Culvert Diameter:

- 15" diameter minimum, unless the ECC has approved a variance.

Culvert Composition / Design:

- Acceptable Materials and Designs
 - Galvanized Steel Corrugated Metal Pipe
 - Aluminized Steel Corrugated Metal Pipe
 - Polyvinyl Chloride (PVC) Storm Sewer Pipe, minimum SDR 26 - Typically green, with a thick wall
 - High Density Polyethylene (HDPE) Double Wall Pipe - Typically black, with a smooth interior
- Unacceptable Materials and Designs
 - HDPE Single Wall Pipe
 - HDPE or PVC Perforated Pipe
 - Smaller diameter PVC Sewer and Drain Pipe (typically found at the big box stores in 4" and 6" diameter)

Acceptable Examples:

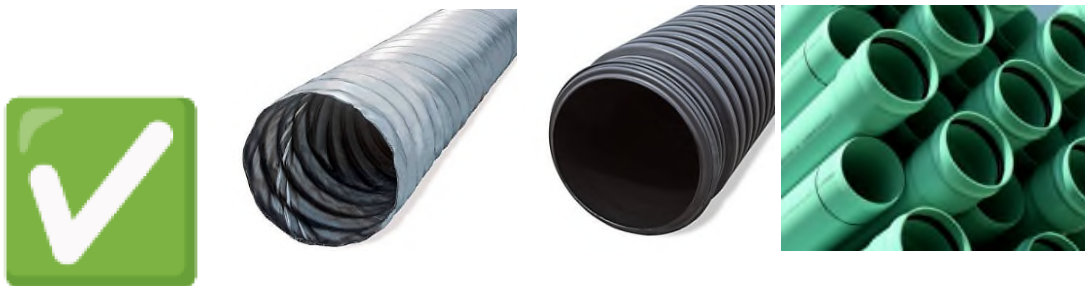

Unacceptable Examples:

